

## 12-24F Fibre Optic Termination Box


### General

#### Description

A 12-24 fibre wall box that is widely used in the FTTH access network. Hinged structure using lightweight plastic offering strength and resistance to chemical and U.V attack. Splice and patch all in the one box

#### Features and Benefits

- 2 main ports, 12 small ports
- Up to 12 FTTH drop cables
- Drop cables are terminated individually
- Accommodate 1x4,1x8 PLC Splitter
- Main cable up to 12 mm diameter, Drop cable up to 3 mm diameter
- IP54 protection

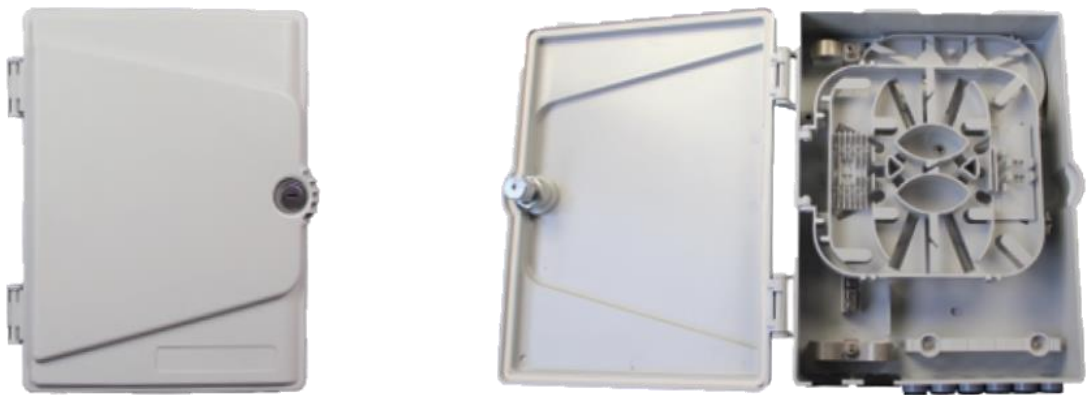

### Ordering Information & Specifications:

Part Number	Description	Dimensions L x W x H (mm)	Number of Input port	Splice Capacity (max)	Adaptor Capacity	Max. input cable diameter
HU-HTTB-X12A	12-24F Fibre Optic Termination Box IP54	258 x 207 x 64	2 cable ports 12 drop cable ports	12	12x SC Simplex 12x LC Duplex	Up to 12mm 2 ports  Up to 3mm drop cable ports