

12-24F Fibre Optic Termination Box


General

Description

A 12-24 fibre wall box that is widely used for FTTH and access networks. Hinged structure using lightweight plastic offering strength and resistance to chemical and U.V attack. Splice and patch all in the one box

Features and Benefits

- Small compact design
- Accommodates up to 24 splices
- Accommodate 1x4,1x8 PLC Splitter with 12 splices
- Main cable up to 12 mm diameter, Drop cable up to 3 mm diameter
- IP54 protection

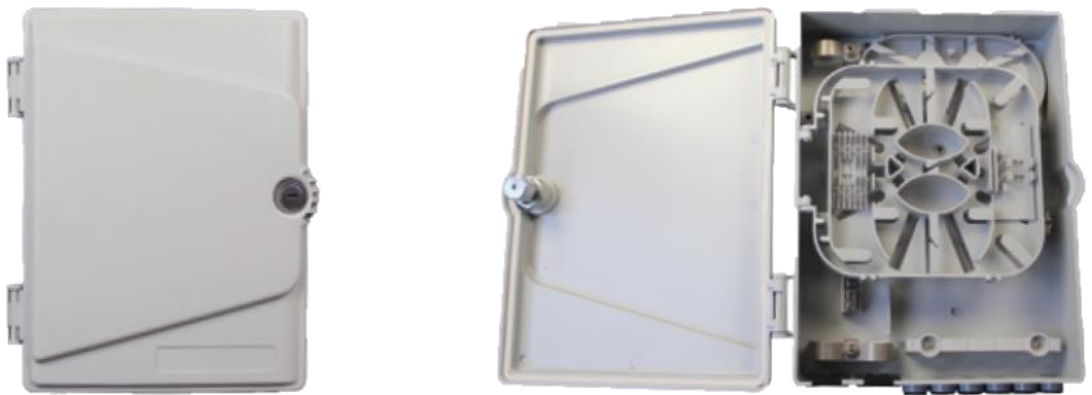

Ordering Information & Specifications:

Part Number	Description	Dimensions L x W x H (mm)	Number of Input port	Splice Capacity (max)	Adaptor Capacity	Max. input cable diameter
HU-HTTB-X12A	12-24F Fibre Optic Termination Box IP54	258 x 207 x 64	2 cable ports 12 drop cable ports	24	12x SC Simplex 12x LC Duplex	Up to 12mm 2 ports Up to 3mm drop cable ports