


12F Inline splice and patch closure

The HTSC-F03 is a compact design for FTTH applications. Hinged structure a ribbed closure constructed using lightweight plastic offering strength and resistance to chemical and U.V attack

Features

- Resistance to vibration, UV and temperature
- Rugged construction with excellent durability
- Easy maintenance after installation
- For cut, uncut, in line and taut sheath applications
- Suitable for both indoor and outdoor cable
- Sheath retention & central strength member anchor system included
- ROHS compliance
- IP55 protection
- Comes with Splice tray

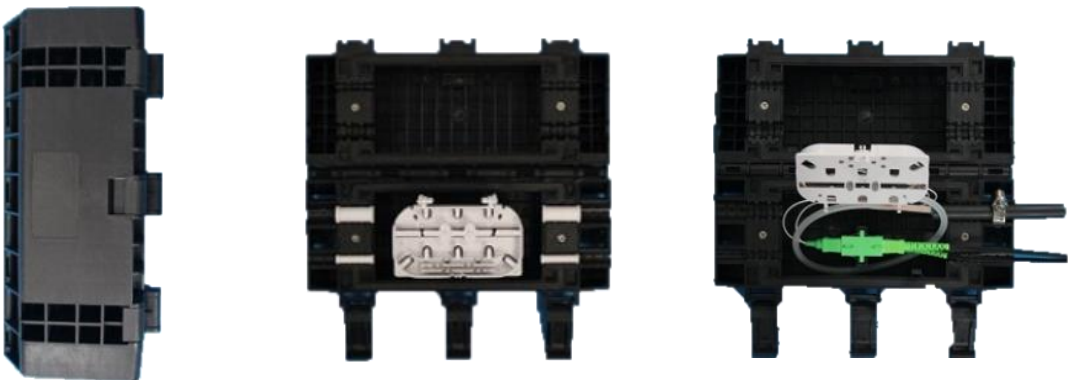

Ordering Information & Specifications:

Part Number	Description	Dimensions L x W x H (mm)	Number of Input port/Max. input cable diameter	Splice Capacity (max) Adaptor Capacity
HU-HTSC-F03	Closure FTTH Aerial, Duct Wall Mount Compact	200 x 94 x 60 mm	4 (2 main & 2 drop) 9.5 - 12 mm main ports 4 – 6mm drop cable ports	12 Fibres 2x SC simplex adaptors