


24F Inline Splice & Patch, Wall/ Pit Mount Closure

The HTSC-F04 is a compact design made from lightweight plastic the offers strength and resistance to chemical and U.V attack.

No special tools required for installation or re-entry this is a great little closure for FTTH applications

Features

- Resistance to vibration, UV and temperature
- Rugged construction with excellent durability
- Compact and lightweight
- For cut, uncut, in line and taut sheath applications
- Suitable for both indoor and outdoor cable
- Sheath retention & central strength member anchor system included
- ROHS compliance
- Main Material-Plastic (MPP)
- Protection Class IP54

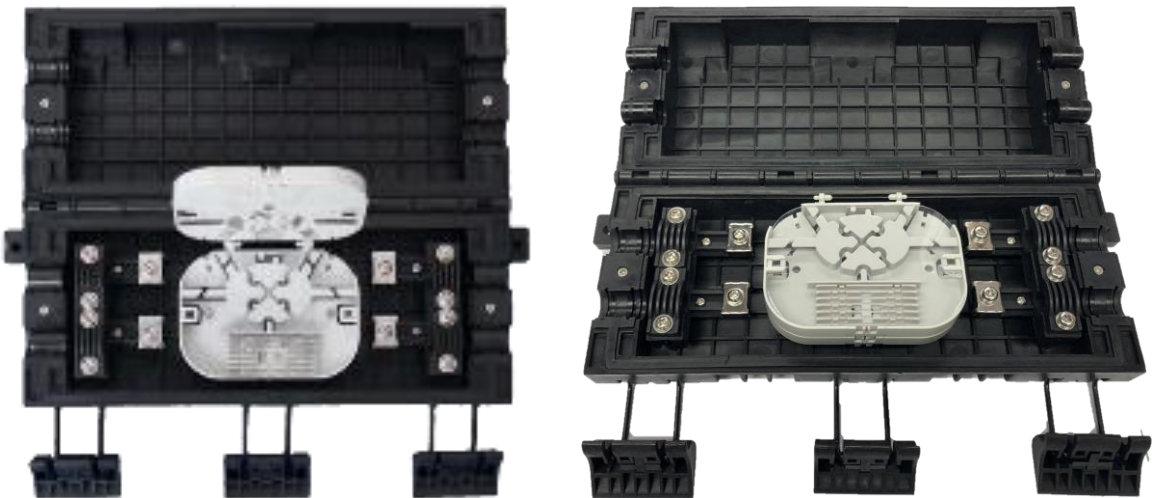

Ordering Information & Specifications:

Part Number	Description	Dimensions L x W x H (mm)	Number of Input port	Splice Capacity (max)	Gland Entry Size (mm)
HU-HTSC-F04	24F Inline Splice & Patch, Wall/ Pit Mount Closure	315 x 120 x 62	4	24 fibers / 2 trays / 4 SC SX adaptors	φ16mm max