


2F Universal Fibre Termination Box

This box is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network systems. It integrates fibre splicing, splitting, distribution, storage and cable connection in one unit. All while providing solid protection and management for the FTTx network buildings.

Features

- Totally enclosed structure
- Protects and manages cable effectively
- Made from high quality PC+ABS protection level up to IP55.
- Good dust and moisture proofing
- Clamping for feeder cable and drop cable, fibre splicing, fixation, storage, distribution...etc all in one
- Suitable for SC and LC duplex adaptor and pigtail
- Light weight and easy to operate
- Light weight and easy to operate
- UV Stabilised, suitable for both outdoor and indoor use

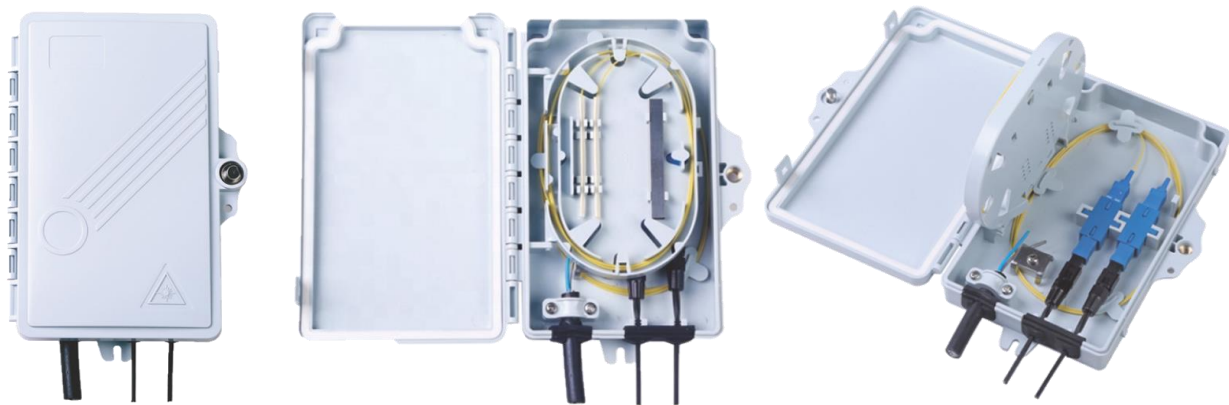

Ordering Information & Specifications:

Part Number	Description	Dimensions L x W x H (mm)	Number of Input port/Max input cable diameter	Max Capacity/ Splice Capacity (max)
JZ-1312-FTTH-2	Universal Fibre Termination Box 2F	168 x 102 x 32	3 (1 main and 2 drop) 9.5 – 12mm main port 3 –mm drop cable ports	4 fibres 2x SC simplex adaptors/ 2 LC duplex adaptors