

**HIGH DENSITY CABLING SOLUTION**



**Super Density Cabling**

- 1U/288F MDC / 144F LC / 72F SC
- 2U/576F MDC / 288F LC / 144F SC
- 4U/1152F MDC / 576F LC / 288F SC

**Easy Operation**

- Standard 19" Patch Panel
- Environmental light weight Aluminum material
- Independent plug-in cassette
- Front-end cable management
- Stable adapter structure

**Various Flexible Cabling**

- Compatible with 8F&12F solution
- Replaceable label and layer remark
- Duplex and Quad adapter available
- Various connectors are optional
- MPO-LC fan out and LC/SC trunk cable
- Multi-applications in Data centre and FTTX

**Specification**

ITEMS	1U ODF	2U ODF	4U ODF
Dimension	435x460x44mm	435x460x88mm	435x460x176mm
Weight ( contain cassette )	3.7 kg	6.4 kg	11.2kg
Packing box	539x366x94mm	539x366x139mm	539x336x226mm
Cassette QTY	6Pcs	12Pcs	24Pcs
Capacity	MDC 288F/LC 144F/SC 72F	MDC 576F/LC 288F/ SC 144F	MDC 1152F/LC 576 F/ SC 288F
Operating Temperature	-20°C ~ +60°C		
Patch cord Category	MPO/MTP-MDC/LC/SC Fan out or MDC/LC/SC trunk patch cord		





**1U/144F LC/72F SC  
1U/288F MDC (2ports adapter)  
1U/432F MDC (3 ports adapter)**



**2U/288F LC/144F SC  
2U/576F MDC (2ports adapter)  
2U/864F MDC (3 ports adapter)**



- 01 24F cassette module, suit for 3x8F/ 2x12F/1x24F LC and 4x12F MDC connection
- 02 Environmental light weight design (Aluminum) and anodized surface treatment guarantee the good quality
- 03 Side mounting bracket design achieve flexible adjustment
- 04 The smart self-lock institute design achieve easy inserting and pulling
- 05 The cassette compatible with LC duplex/SC simplex/MPO figure SC / MDC 2 ports adapters
- 06 Pocket label convenient for independent label printing and replacement

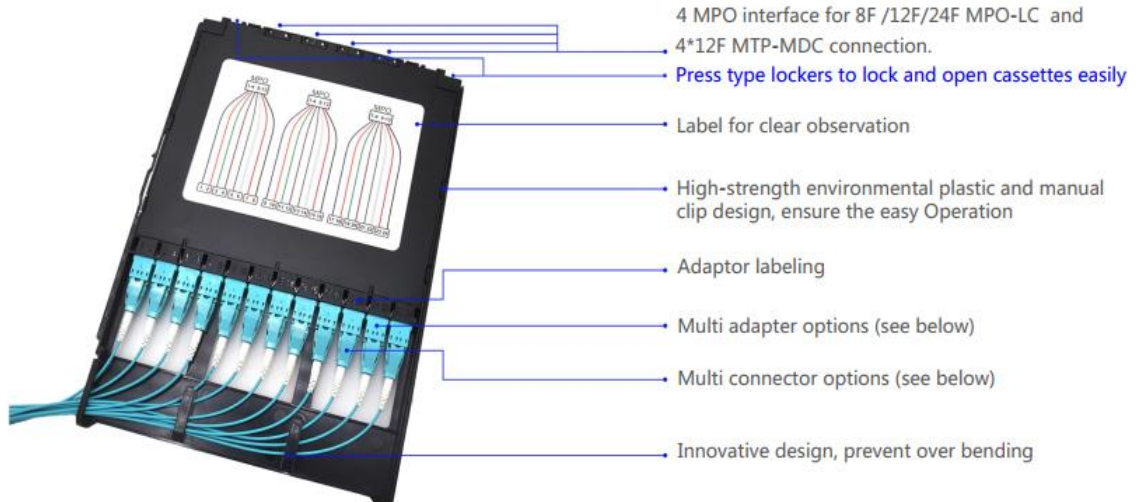

MDC 2 ports adapter



MDC 3 ports adapter



MPO Connector



LC duplex inner shutter adapter



2-MPO-12LC Connection



3-MPO-8LC Connection



1-MPO-24LC Connection



3\*1X8 PLC Connection



24 Splice connection