

Hybrid Adaptors/ Bulkheads

Hybrid Adaptors

We have a wide variety of adaptor configurations to meet almost any application. Ensuring two connectors are in perfect alignment is a critical part of the network. Couplers, hybrid adaptors, male to female type adaptors or bare fibre adaptors are available


Features

- Premium quality sleeve with precision alignment
- Low insertion loss
- Very broad variety of choices of different hybrid connector combinations
- Different ferrule dimensions from LC to SC


Specifications

Model	Adaptor		
	Singlemode		Multimode
Type	UPC	APC	PC
Insertion Loss (dB)	≤ 0.3	≤ 0.3	≤ 0.2
Return loss (dB)	> 50	> 65	> 25
Durability	0.2 dB Max Increase		
Operating Temperature	-40 ~ +85 °C		
Type	Female to Female Hybrid Adaptors		


FC - SC Type

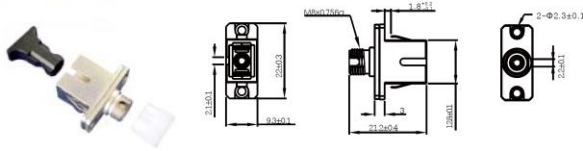

FC - ST Type

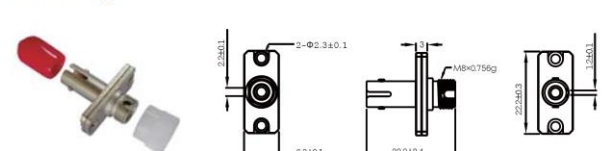

SC - ST Type

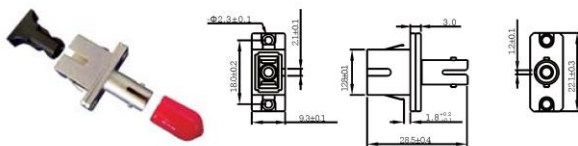

MU - SC Type



LC - SC Type



FC - DIN Type



MU - LC Type



FC - LC Type

