

# Active V-groove Fusion Splicer TYPE-400S




- Typical Splice Time Approx. 7 sec
- Typical Heat Time Approx. 24 se
- 129W x 195D x 99H (mm)

- Auto Rotate Blade Functionality
- 12,000 more cleaves
- 100W x 81D 63H (mm)

## Fast, Versatile, Easy



Fast and Reliable

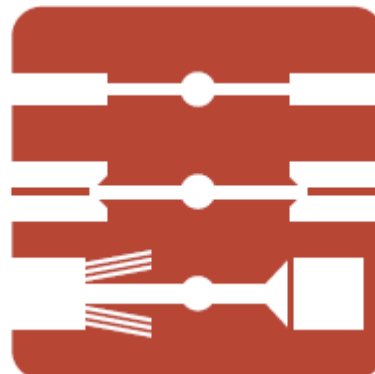

All FTTX splicing in  
one machine



Simple, easy to use  
operation

# Active V-groove Fusion Splicer TYPE-400S

## Specifications

Items	T-400S	
Optical fiber requirements	Material	Silica glass
	Fiber count / Profile types	Single / SMF(G.652), MMF(G.651)
	Fiber diameter	Cladding diameter :125 μm, Coating diameter :Up to 3mm by multi clamp
	Cleave length	5 to 16mm for single fiber
Standard performance	Splice loss (typical)*1	SMF :0.03dB, MMF :0.01dB, DSF :0.05dB, NZDSF :0.05dB
	Return loss (typical)	60dB or greater
	Splice time (typical)	6sec (SM G652 Quick Mode)
	Heating time (typical)	24sec (FPS-61-2.6 sleeve, S60mm 0.25 Mode)
	Splice & Heat cycles per battery full charge*2	Approx. 200 (BU-15)
	Fiber view & magnification	2 CMOS cameras observation, 200X Max.
	Proof test	1.96 ~2.09N
Programs	Applicable protection sleeve	60mm, 40mm & Sumitomo Nano sleeves
	Splice programs	Max. 150, 12 are pre-optimised, 100 editable by user (38 to be pre-optimised)
	Heating programs	Max. 50, 12 are pre-optimised, 20 editable by user (18 to be pre-optimised)
Functions	Splice image capture / Splice data storage	100 images / 10,000 splice data (internal memory only)
	Auto-start	Splice/Heating
	Multi clamp	Provided, applicable for 250 & 900 μm coated fiber, 2 & 3mm jacket cord and rectangular drop cable
	Heater clamp for splice on connector	Provided
	Automatic arc calibration	Automatically compensates for environmental condition changes
Size / Weight	Size	129(W) x 195(D) x 99(H) mm (without protrusion)
	Weight	1.2kg (without Battery), 1.3kg (with Battery BU-15)
	Monitor	4.3" color LCD display
Terminals	USB port	USB 2.0 (mini-B type)
Power supply	AC input	AC100 ~240V, 50/60Hz (ADC-15)
	DC input	DC 10 ~15V
	Battery pack	Li-ion 10.8V, 35.64Wh (BU-15)
Operating condition	Altitude :0 ~5,000m, Temperature :-10 ~+50°C, Humidity :0 ~95%RH (non-condensing), Wind velocity :up to 15m/sec	
Storage condition	Temperature :-40 ~+80°C, Humidity :0 ~95%RH (non-condensing), Battery :-20 ~+30°C (long term)	
Electrode life *3	6,000 arc discharges	
Software updates	Internet	

\*1: Average value of the final inspection in room temperature with Sumitomo identical fiber. Measured by cut-back method relevant to ITU-T and IEC standards.

\*2 : Splice & Heat cycles may vary depending on the battery status and the operating environment.

\*3 : Achieved in lab condition. Electrode life may vary depending on the operating environment.

Environmental Durability*	
	Test details
Shock resistance	Drop from 76cm on bottom face only
Water resistance	Equivalent to IPx1 Operates normally after being exposed to vertically dripping water at 1mm/min for 10min
Dust resistance	Equivalent to IP5x Operates normally after 8 hours in a test chamber with circulating dust particles smaller than 75 μm

\*Splicer operation after shock, water or dust tests, was confirmed under battery power, by Sumitomo.  
Does not guarantee the product will not be damaged by these conditions.

Basic Accessories		
Part name	Part No.	Qty.
AC adapter	PS-T400-15	1pc
AC power cord	PC-AC2-2P	1pc
Battery pack	BU-15	1pc
Quick reference guide	—	1pc
Carrying case	CC-15	1pc

\*X=2(USA), 3(EU), 5(UK/HK), 6(AUS), 8(CHINA), 9(INDIA)  
Items listed in Basic Accessories are always included with the splicer body.  
Overall kit content may vary regionally. Please check with your local authorized reseller to confirm kit content in your region.

Accessories			
	Part name	Part No.	Remarks
Accessories for Splicer	Fiber holder	FHS-025-LB5-SEI	For 0.9mm loose buffered single fiber
	Battery pack	BU-15	Li-ion 10.8V, 35.64Wh
	Car battery cable	PC-V25	For car battery operation (cigarette socket type)
	V-groove cleaning brush	VGB-003-CR	Brush for cleaning V-groove
	Electrode	ER-10	—
Accessories	Work table	WT-15	Handy table with neck strap
	Fiber cleaver	FC-6S-C FC-6RS-C	Table-top high precision cleaver Automatic blade rotation cleaver
	Handheld fiber cleaver	FC-8R	Automatic blade rotation cleaver with counter
		FC-8R-F	Automatic blade rotation cleaver (without counter)
	Jacket remover	JR-M03	Jacket remover for single fiber
	Loose tube cutter	LTC-01	—
	Alcohol dispenser	HL-3	—
	Fiber protection sleeve	FPS-1	60mm, diameter after shrink approx. 3.2mm
		FPS-40-10P	40mm, diameter after shrink approx. 3.2mm
		FPS-61-2.6	61mm, diameter after shrink approx. 2.6mm

Specifications are subject to change without prior notice.



Handy cleaver  
FC-8R series



Table-top cleaver  
FC-6 / FC-6R series



Jacket remover  
JR-M03



Compatible with  
Lynx-CustomFit™  
Splice-on Connector



Electrode  
ER-10

## Ordering Information:

Part: **SEI-T400S**

Description: **Sumitomo T400S Fusion Splicer Active "V" Groove**

**Please contact atg for more detail and delivery times**

Designed in Japan  
400S02-GLOB-EN001 (2017.05)  
(TP)



Copyright 2020 atg Technology Group Limited 34 William Pickering Drive Albany

www.atg ltd.co.nz

