

HTTB-V24 Splicing and Patching Box

General

Description


- The HTTB-V24 is a multipurpose fibre optic distribution-termination box used to provide a flexible platform to address the multitude of applications that exist in residential and commercial FTTx installations.

Features and Benefits

- Available only for SC adapters (up to 24 Simplex SC adapters)
- Sheath retention & central strength member termination system included
- Rugged and durable construction for long term reliability (UV resistance)
- Designed for Wall and Pole mount applications
- Accepts loose tube and distribution cables
- Resistance to vibration and shock
- Door with secure mechanism
- 2 inlet ports (for cables with max diameter 24.5mm)
- Up to 24 drop cables
- ROHS compliance



Rubber outlet port options

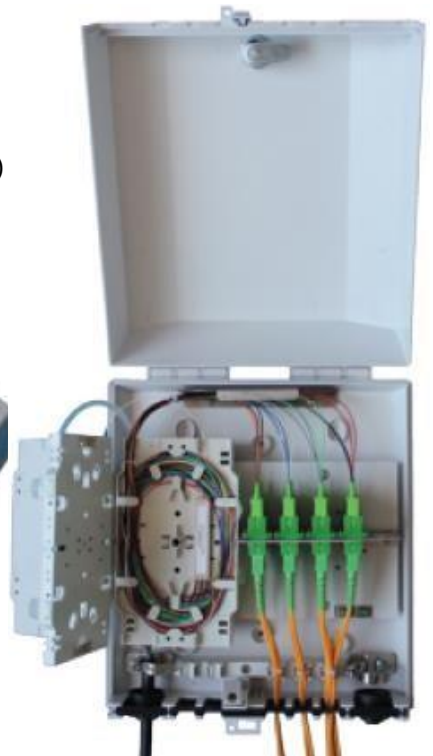

Parameter	Value
Dimensions (L x W x H)	272.5 x 235 x 84.5 mm
PLC Splitter	1x8, 1x16, PLC Splitter
Adaptors	24 SC Adaptors
Inlet Cable Port	2 cable ports (for cables up to 24.5mm diameter)
Outlet Cable Port	5 ports (for cables up to 12mm diameter)
Protection Class	IP55