

High Density Cabling Solution



SuperDensityCabling

- 1U/288F MDC /144F LC/72F SC
- 2U/576F MDC /288F LC /144F SC
- 4U/1152F MDC /576F LC /288F SC

Easy Operation

- Standard 19"Patch Panel
- Environmental light weight Aluminum material
- Independent plug-in cassette
- Front-end cable management
- Stable adapter structure

Various Flexible Cabling

- Compatible with 8F&12F solution
- Replaceable label and layer remark
- Duplex and Quad adapter available
 - Various connectors are optional
- MPO-LC fan out and LC/SC trunk cable
- Multi-applications in Data centre and FTTX

Specification

ITEM	1U ODF	2U ODF	4U ODF
Dimension	435x460x44mm	435x460x88mm	435x460x176mm
Weight (contain cassette)	3.7 kg	6.4 kg	11.2kg
Packing box	539x366x94mm	539x366x139mm	539x336x226mm
CassetteQTY	6Pcs	12Pcs	24Pcs
Capacity	MDC 288F/LC 144F/SC 72F	MDC 576F/LC 288F/ SC 144F	MDC 1152F/LC 576 F/ SC 288F
Operating Temperature	-20°C~+60°C		
Patch cord Category	MPO/MTP-MDC/LC/SC Fan out or MDC/LC/SC trunk patch cord		



1U/144F LC/72F SC

1U/288F MDC (2ports adapter)


1U/432F MDC (3 ports adapter)



2U/288F LC/144F SC

2U/576F MDC (2ports adapter)

2U/864F MDC (3 ports adapter)

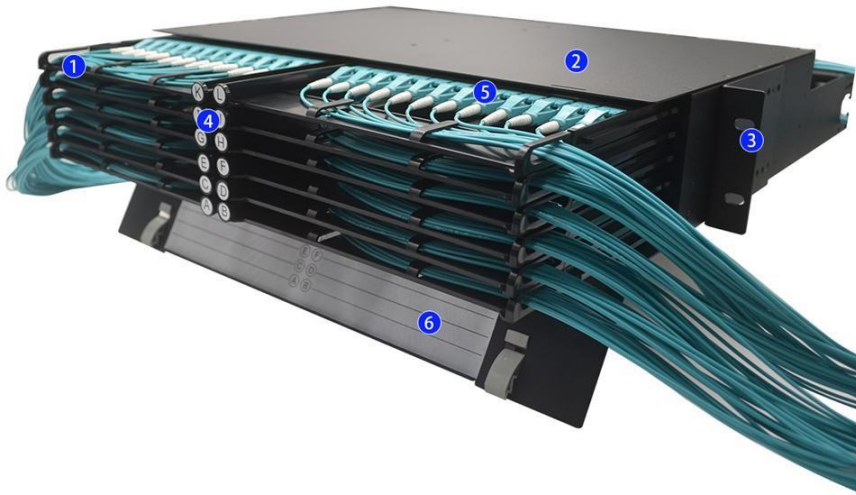

- 01** 24F cassette module, suit for 3x8F/ 2x12F/1x24F LC and 4x12F MDC connection
- 02** Environmental light weight design (Aluminum) and anodized surface treatment guarantee the good quality
- 03** Side mounting bracket design achieve flexible adjustment
- 04** The smart self-lock institute design achieve easy inserting and pulling
- 05** The cassette compatible with LC duplex/SC simplex/MPO figure SC / MDC 2 ports adapters
- 06** Pocket label convenient for independent label printing and replacement




- 01** Independent cassette for smart cable management
- 02** Multi-Layer Cassette for easy separated operation
- 03** Label corresponding with each cassette for clear identification. Open and close the cassettes by pushing the label keys



Design with reserved space for cable in with 24F splicing connection.

Each cassette support 4 MPO/MTP adaptor. Available for 1x24, 2x12 and 3x8 LC and 4x12 MDC solutions

Panel with independent cable management frame to fix the trunk cable

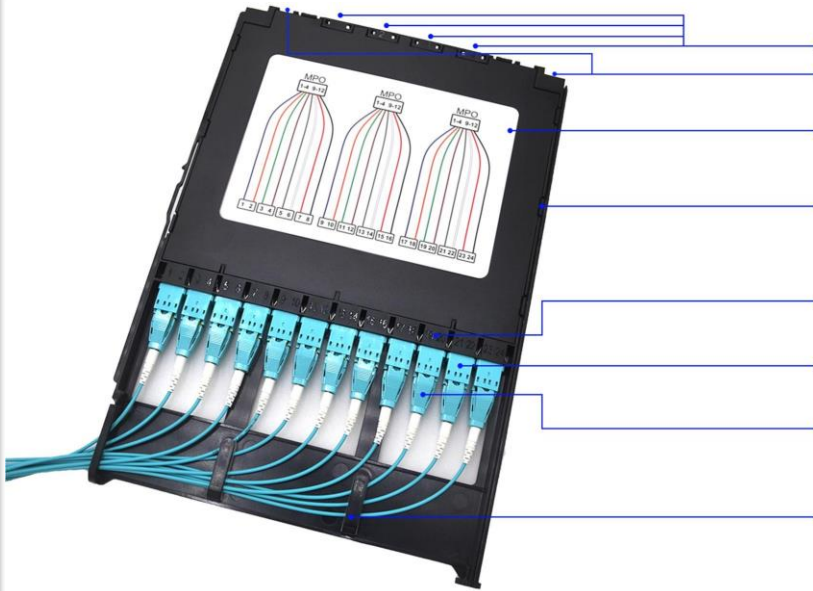


- 4 MPO interface for 8F /12F/24F MPO-LC and 4*12F MTP-MDC connection.
- Press type lockers to lock and open cassettes easily
- Label for clear observation
- High-strength environmental plastic and manual clip design, ensure the easy Operation
- Adaptor labeling
- Multi Adaptor Options – see below
- Multi Connector Options – see below
- Innovative design, prevent over bending



MDC 2 ports adapter



MDC 3 ports adapter



LC duplex inner shutter adapter



MPO Connector



2-MPO-12 LC Connection



3-MPO-8 LC Connection



1-MPO-24 LC Connection



3*1X8 PLC Connection



24 Splice connection